


# Twin Fokus

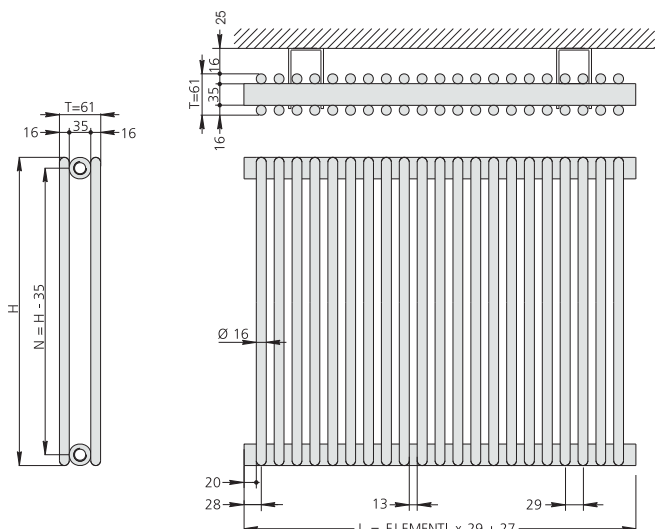

H = 535-570-635-650-720-735-835-850-970 mm min. 3 el. (L=114mm), max. 80 el. (L=2347mm)

H = 1470-1770-1970 mm min. 3 el. (L=114mm) max 40 el. (L=1187mm)

**Rinforzi / Reinforcements:**

H = 1470-1770-1970 mm: n.2 rinforzi sul retro del radiatore/nr.2 reinforcements on the back of the radiator

**Accessori a corredo:** sostegni per il montaggio a parete - n°1 sfiato e n°1 cieco

**Accessories supplied:** wall-mounting brackets - 1 vent and 1 blind



**Allacciamenti standard/Standard connections**



**<Twin Fokus>**

Altezza/Height H (mm)	535	570	635	650	720	735	835	850	970	1470	1770	1970
Interasse/Con. cent N (mm)	500	535	600	615	685	700	800	815	935	1435	1735	1935
Peso/Weight P (Kg)	0,66	0,68	0,76	0,78	0,84	0,86	0,96	0,97	1,10	1,63	1,96	2,16
Capacità/Capacity (l)	0,20	0,21	0,23	0,24	0,26	0,26	0,29	0,30	0,33	0,48	0,56	0,62
Esponente/Exponent n	1,31	1,32	1,32	1,32	1,32	1,32	1,32	1,32	1,32	1,32	1,32	1,32
Resa termica/Power Δt 50K (75/65/20 °C)	31	33	37	38	42	43	48	49	54	79	95	105

■ Misure per sostituzione radiatori in alluminio/Measures for replacing aluminum radiators



■ Misure per sostituzione radiatori in ghisa/Measures for replacing cast iron radiators

Nr. El.	L= mm	Altezza/Height H (mm)											
		535	570	635	650	720	735	835	850	970	1470	1770	1970
<b>8</b> 259 mm	W	248	264	296	304	336	344	384	392	432	632	760	840
<b>10</b> 317 mm	W	310	330	370	380	420	430	480	490	540	790	950	1.050
<b>12</b> 375 mm	W	372	396	444	456	504	516	576	588	648	948	1.140	1.260
<b>14</b> 433 mm	W	434	462	518	532	588	602	672	686	756	1.106	1.330	1.470
<b>16</b> 491 mm	W	496	528	592	608	672	688	768	784	864	1.264	1.520	1.680
<b>18</b> 549 mm	W	558	594	666	684	756	774	864	882	972	1.422	1.710	1.890
<b>20</b> 607 mm	W	620	660	740	760	840	860	960	980	1.080	1.580	1.900	2.100
<b>22</b> 665 mm	W	682	726	814	836	924	946	1.056	1.078	1.188	1.738	2.090	2.310
<b>24</b> 723 mm	W	744	792	888	912	1.008	1.032	1.152	1.176	1.296	1.896	2.280	2.520
<b>26</b> 781 mm	W	806	858	962	988	1.092	1.118	1.248	1.274	1.404	2.054	2.470	2.730
<b>28</b> 839 mm	W	868	924	1.036	1.064	1.176	1.204	1.344	1.372	1.512	2.212	2.660	2.940
<b>30</b> 897 mm	W	930	990	1.110	1.140	1.260	1.290	1.440	1.470	1.620	2.370	2.850	3.150
<b>32</b> 955 mm	W	992	1.056	1.184	1.216	1.344	1.376	1.536	1.568	1.728	2.528	3.040	3.360
<b>34</b> 1013 mm	W	1.054	1.122	1.258	1.292	1.428	1.462	1.632	1.666	1.836	2.686	3.230	3.570
<b>36</b> 1071 mm	W	1.116	1.188	1.332	1.368	1.512	1.548	1.728	1.764	1.944	2.844	3.420	3.780
<b>38</b> 1129 mm	W	1.178	1.254	1.406	1.444	1.596	1.634	1.824	1.862	2.052	3.002	3.610	3.990
<b>40</b> 1187 mm	W	1.240	1.320	1.480	1.520	1.680	1.720	1.920	1.960	2.160	3.160	3.800	4.200
<b>42</b> 1245 mm	W	1.302	1.386	1.554	1.596	1.764	1.806	2.016	2.058	2.268			
<b>44</b> 1303 mm	W	1.364	1.452	1.628	1.672	1.848	1.892	2.112	2.156	2.376			
<b>46</b> 1361 mm	W	1.426	1.518	1.702	1.748	1.932	1.978	2.208	2.254	2.484			
<b>48</b> 1419 mm	W	1.488	1.584	1.776	1.824	2.016	2.064	2.304	2.352	2.592			
<b>50</b> 1477 mm	W	1.550	1.650	1.850	1.900	2.100	2.150	2.400	2.450	2.700			

**ACCESSORI / ACCESSORIES**



# Twin Fokus Orizzontale

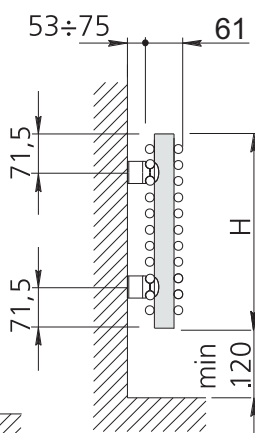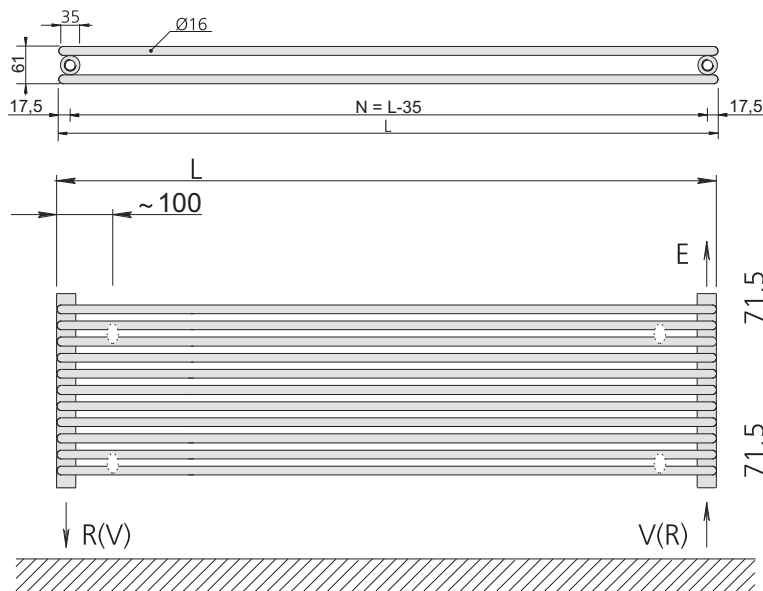

L = 535-570-635-650-720-735-835-850-970 mm  
min. 3 el. (H=114mm), max 80 el. (H=2347mm)


L = 1470-1770-1970 mm  
min. 3 el. (H=114mm), max 40 el. (H=1187mm)

**Rinforzi/Rinforzi:**  
L = 1470-1770-1970 mm: n.2 rinforzi sul retro del radiatore/nr.2 reinforcements on the back of the radiator

**Accessori a corredo:** sostegni per il montaggio a parete - n°1 sfiato e n°1 cieco

**Accessories supplied:** wall-mounting brackets - 1 vent and 1 blind

## Allacciamenti standard/Standard connections

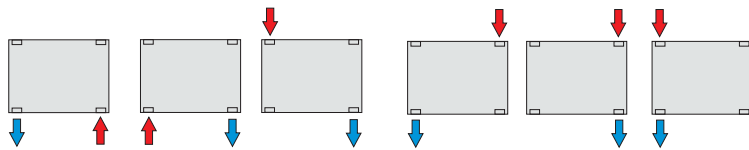

## <Twin Fokus Orizzontale>

Larghezza/Width H (mm)	535	570	635	650	720	735	835	850	970	1470	1770	1970
Interasse/Con. cent N (mm)	500	535	600	615	685	700	800	815	935	1435	1735	1935
Peso/Weight P (Kg)	0,66	0,68	0,76	0,78	0,84	0,86	0,96	0,97	1,10	1,63	1,96	2,16
Capacità/Capacity (l)	0,20	0,21	0,23	0,24	0,26	0,26	0,29	0,30	0,33	0,48	0,56	0,62
Esponente/Exponent n	1,31	1,32	1,32	1,32	1,32	1,32	1,32	1,32	1,32	1,32	1,32	1,32
Resa termica/Power Δt 50K (75/65/20 °C)	31	33	37	38	42	43	48	49	54	79	95	105

Nr. El.	H= mm	Larghezza/Width H (mm)											
		535	570	635	650	720	735	835	850	970	1470	1770	1970
<b>8</b> 259 mm	W	248	264	296	304	336	344	384	392	432	632	760	840
<b>10</b> 317 mm	W	310	330	370	380	420	430	480	490	540	790	950	1.050
<b>12</b> 375 mm	W	372	396	444	456	504	516	576	588	648	948	1.140	1.260
<b>14</b> 433 mm	W	434	462	518	532	588	602	672	686	756	1.106	1.330	1.470
<b>16</b> 491 mm	W	496	528	592	608	672	688	768	784	864	1.264	1.520	1.680
<b>18</b> 549 mm	W	558	594	666	684	756	774	864	882	972	1.422	1.710	1.890
<b>20</b> 607 mm	W	620	660	740	760	840	860	960	980	1.080	1.580	1.900	2.100
<b>22</b> 665 mm	W	682	726	814	836	924	946	1.056	1.078	1.188	1.738	2.090	2.310
<b>24</b> 723 mm	W	744	792	888	912	1.008	1.032	1.152	1.176	1.296	1.896	2.280	2.520
<b>26</b> 781 mm	W	806	858	962	988	1.092	1.118	1.248	1.274	1.404	2.054	2.470	2.730
<b>28</b> 839 mm	W	868	924	1.036	1.064	1.176	1.204	1.344	1.372	1.512	2.212	2.660	2.940
<b>30</b> 897 mm	W	930	990	1.110	1.140	1.260	1.290	1.440	1.470	1.620	2.370	2.850	3.150
<b>32</b> 955 mm	W	992	1.056	1.184	1.216	1.344	1.376	1.536	1.568	1.728	2.528	3.040	3.360
<b>34</b> 1013 mm	W	1.054	1.122	1.258	1.292	1.428	1.462	1.632	1.666	1.836	2.686	3.230	3.570
<b>36</b> 1071 mm	W	1.116	1.188	1.332	1.368	1.512	1.548	1.728	1.764	1.944	2.844	3.420	3.780
<b>38</b> 1129 mm	W	1.178	1.254	1.406	1.444	1.596	1.634	1.824	1.862	2.052	3.002	3.610	3.990
<b>40</b> 1187 mm	W	1.240	1.320	1.480	1.520	1.680	1.720	1.920	1.960	2.160	3.160	3.800	4.200
<b>42</b> 1245 mm	W	1.302	1.386	1.554	1.596	1.764	1.806	2.016	2.058	2.268			
<b>44</b> 1303 mm	W	1.364	1.452	1.628	1.672	1.848	1.892	2.112	2.156	2.376			
<b>46</b> 1361 mm	W	1.426	1.518	1.702	1.748	1.932	1.978	2.208	2.254	2.484			
<b>48</b> 1419 mm	W	1.488	1.584	1.776	1.824	2.016	2.064	2.304	2.352	2.592			
<b>50</b> 1477 mm	W	1.550	1.650	1.850	1.900	2.100	2.150	2.400	2.450	2.700			

**ACCESSORI / ACCESSORIES**

