


Q-Double

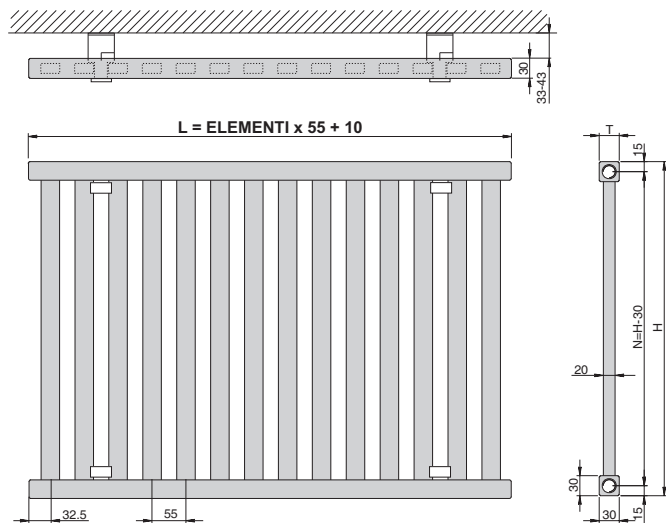

L = min. 2 el. (L=120mm) max 32 el. (L=1770mm)

Accessori a corredo: sostegni per il montaggio a parete - n°1 sfiato e n°1 cieco

Accessories supplied: wall-mounting brackets - 1 vent and 1 blind



Allacciamenti standard/Standard connections



<Q-Double>


Altezza/Height H (mm)	485	585	735	985
Interasse/Con. cent N (mm)	455	555	705	955
Peso/Weight P (Kg)	0,41	0,47	0,56	0,71
Capacità/Capacity (l)	0,28	0,32	0,39	0,50
Esponente/Exponent n	1,26	1,26	1,27	1,28
Resa termica/Power Δt 50K (75/65/20 °C)	29	35	42	55

Nr. El.	L= mm		Altezza/Height H (mm)			
			485	585	735	985
4 230	W		116	140	168	220
5 285	W		145	175	210	275
6 340	W		174	210	252	330
7 395	W		203	245	294	385
8 450	W		232	280	336	440
9 505	W		261	315	378	495
10 560	W		290	350	420	550
11 615	W		319	385	462	605
12 670	W		348	420	504	660
13 725	W		377	455	546	715
14 780	W		406	490	588	770
15 835	W		435	525	630	825
16 890	W		464	560	672	880
17 945	W		493	595	714	935
18 1000	W		522	630	756	990
19 1055	W		551	665	798	1.045
20 1110	W		580	700	840	1.100
21 1165	W		609	735	882	1.155
22 1220	W		638	770	924	1.210
23 1275	W		667	805	966	1.265
24 1330	W		696	840	1.008	1.320
25 1385	W		725	875	1.050	1.375
26 1440	W		754	910	1.092	1.430
27 1495	W		783	945	1.134	1.485
28 1550	W		812	980	1.176	1.540
29 1605	W		841	1.015	1.218	1.595
30 1660	W		870	1.050	1.260	1.650
31 1715	W		899	1.085	1.302	1.705
32 1770	W		928	1.120	1.344	1.760

ACCESSORI / ACCESSORIES



Q-Double Orizzontale

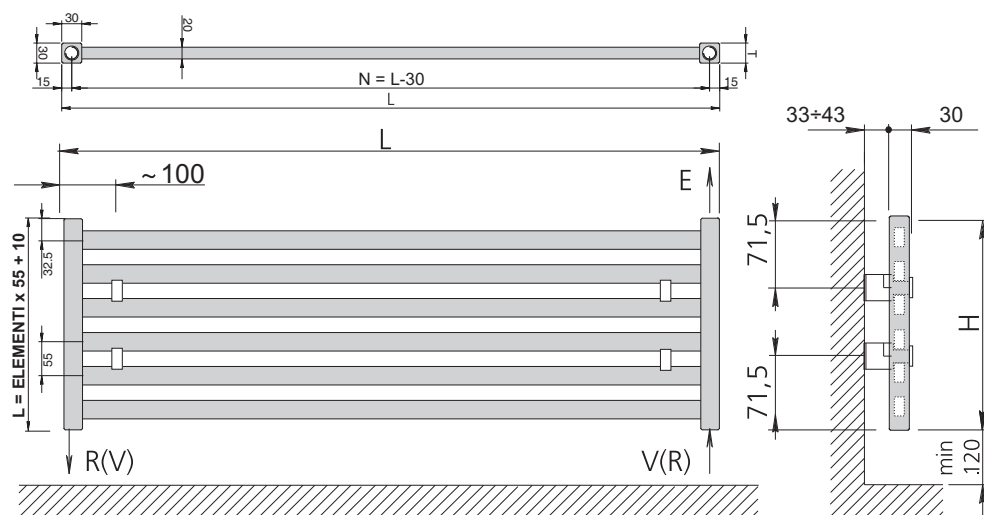


H = min. 2 el. (H=120mm) max 32 el. (H=1770mm)

Accessori a corredo: sostegni per il montaggio a parete - n°1 sfiato e n°1 cieco

Accessories supplied: wall-mounting brackets - 1 vent and 1 blind

Allacciamenti standard/Standard connections

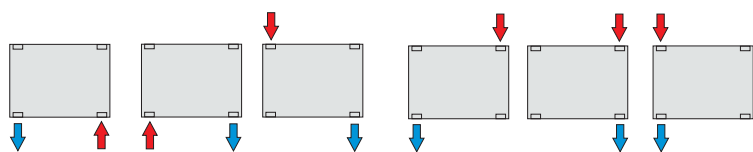

<Q-Double Orizzontale>

Larghezza/Width H (mm)	485	585	735	985
Interasse/Con. cent N (mm)	455	555	705	955
Peso/Weight P (Kg)	0,41	0,47	0,56	0,71
Capacità/Capacity (l)	0,28	0,32	0,39	0,50
Esponente/Exponent n	1,26	1,26	1,27	1,28
Resa termica/Power Δt 50K (75/65/20 °C)	29	35	42	55

Nr. El. H= mm		Larghezza/Width H (mm)			
		485	585	735	985
4 230	W	116	140	168	220
5 285	W	145	175	210	275
6 340	W	174	210	252	330
7 395	W	203	245	294	385
8 450	W	232	280	336	440
9 505	W	261	315	378	495
10 560	W	290	350	420	550
11 615	W	319	385	462	605
12 670	W	348	420	504	660
13 725	W	377	455	546	715
14 780	W	406	490	588	770
15 835	W	435	525	630	825
16 890	W	464	560	672	880
17 945	W	493	595	714	935
18 1000	W	522	630	756	990
19 1055	W	551	665	798	1.045
20 1110	W	580	700	840	1.100
21 1165	W	609	735	882	1.155
22 1220	W	638	770	924	1.210
23 1275	W	667	805	966	1.265
24 1330	W	696	840	1.008	1.320
25 1385	W	725	875	1.050	1.375
26 1440	W	754	910	1.092	1.430
27 1495	W	783	945	1.134	1.485
28 1550	W	812	980	1.176	1.540
29 1605	W	841	1.015	1.218	1.595
30 1660	W	870	1.050	1.260	1.650
31 1715	W	899	1.085	1.302	1.705
32 1770	W	928	1.120	1.344	1.760

ACCESSORI / ACCESSORIES

